
AQUALISA





SIREN™ SL EXPOSED MIXER SHOWER

WITH ADJUSTABLE HEAD

DIMENSIONAL DRAWINGS

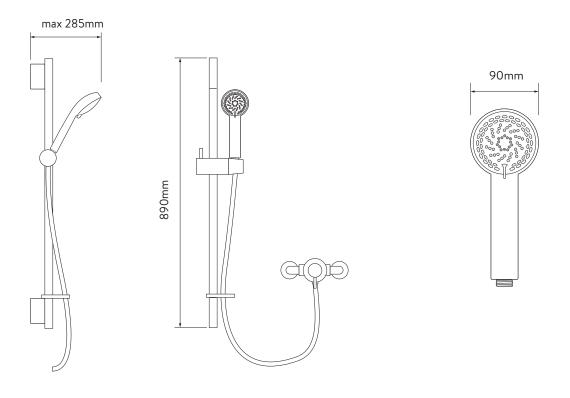





AQUALISA SIREN™ SL EXPOSED



WITH ADJUSTABLE HEAD

MIXER SHOWER

TECHNICAL SPECIFICATIONS

MINIMUM PRESSURE REQUIREMENTS	0.1 bar
MAXIMUM PRESSURE REQUIREMENTS	10 bar
INLET FITTING CONNECTIONS	15mm compression
INLET SUPPLY POSITIONS	Hot/left, cold/right
OUTLET CONNECTIONS	1/2" BSP
VALVE INLET CENTRES	148-155mm
SUPPLY TEMPERATURE	5 - 20°C Cold Supply 55 - 65°C Hot Supply
WATER SYSTEM	Gravity, Boosted Gravity, Combi and Balanced High Pressure
FEATURES	Separate on/off and temperature controls
	All metal valves
	Eco-setting can deliver water savings of up to 25%
	4 spray patterns including an eco-setting
COLOUR	Chrome
GUARANTEE PERIOD	5-year guarantee (valve)
	2-year guarantee (head and kit)
APPROVALS	WRAS