



EBRO

4G4128 – WATER SAVING BASIN MIXER

Francis Pegler
BY COMAP



Specification

Finish	Chrome
Body	Brass
Fittings	Metal plate, washer, stud & locking nut
Connection	M12 – DN8 flexible hoses with 1/2" BSP threaded ends
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C




Flow rates

Pressure	0.1	0.5	1	3
L/min	1.2	5.3	8.2	15.4

All Pressures are in Bar.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Certifications

<i>Tested at 3 bar</i>	

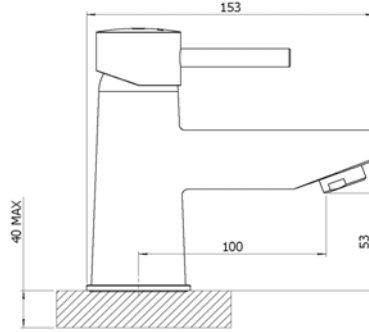

Features & Benefits

 Guarantee	 High Pressure	 Flexible Hose	 Water Saving
 Flow Straightener	 Flow Aerator	 Single Flow	

