


Cosmetic mirrors

17612019003 Cosmetic mirror

PRODUCT



DRAWING

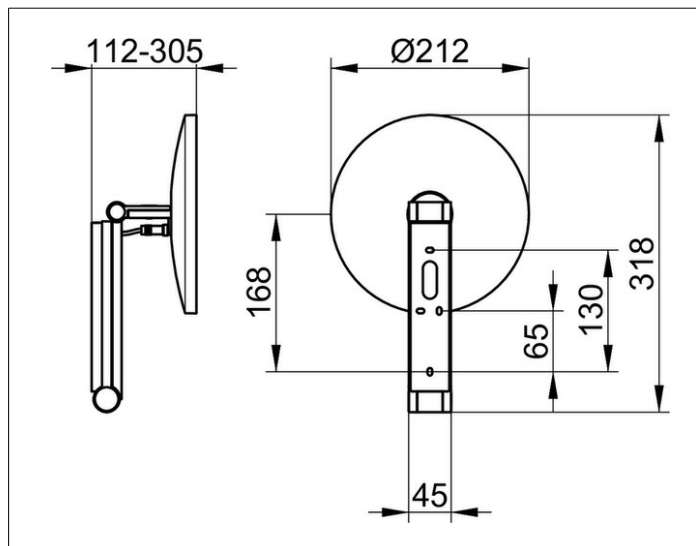

PRODUCT ATTRIBUTES

illuminated, 1 light colour 6500 kelvin (day light),
operation by light switch, in-wall cable layout,
on pivoted rail adjustable in three dimensions,
one-sided mirror, magnification factor x 5

Operation:

Light switch (not included in delivery)

Power supply:

Mains connection via wall socket

12 V in-wall adapter, input 220-240 V,

standby consumption: 0 watt

Illumination:

LED 4,5 watt (lifespan > 50.000 hours)

EEK: D , 5 kWh/1000h

SURFACE

chrome-plated

DIMENSION

1 Lichtfarbe, ohne Kabel

SPECIFICATIONS

KEUCO iLook_move cosmetic mirror, 17612019003

high quality cosmetic mirror, round,

chrome-plated, illuminated,

on pivoted rail,

wall mounted surface with 4 fixing point

for an optimal load distribution,

adjustable in three dimensions, one sided mirror,

magnification factor x 5,

Mains connection via wall socket,

12V in-wall adapter (included),

input 220-240 V and in-wall cable layout,

Illumination: 1 x 4,5 Watt LED (maintenance-free),

Standby consumption: 0 Watt

Operation by light switch

not included in delivery,

1 light colour: 6500 Kelvin (daylight),

Height wall fixing 180 mm, width ca. 45 mm,

max. height ca. 500 mm,

outside diameter 212 mm, max. depth ca. 300 mm,

the cosmetic mirror is fixed concealed

delivery includes anti-corrosion fixings

Note:

In-wall power supply and low voltage connecting cable (500 mm)
are included in delivery.

Due to the in-wall cable routing the position of the cosmetic mirror
must be already defined in shell construction.

For the in-wall cable routing and the integration of the in-wall power supply
we offer according to type of wall suitable rough sets.

Please order separately:

Rough part wall socket for cavity wall installation: Art.Nr. 17699000003

Rough part wall socket for mounting to the brickwork: Art.Nr. 17699000004