


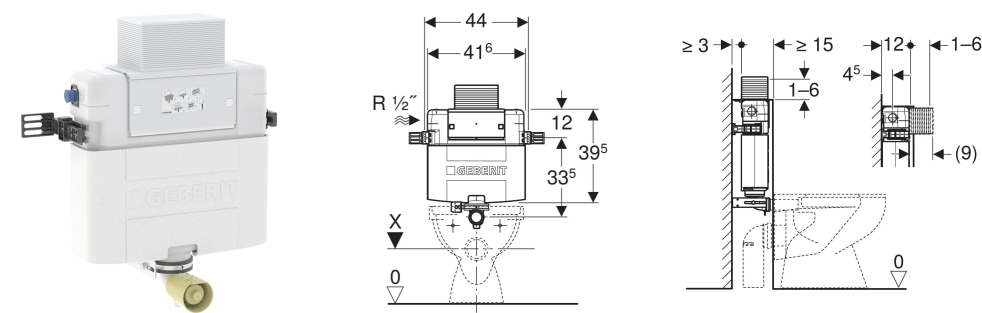

APPLICATION PURPOSES

- For masonry walls
- For installation in part-height prewall installations
- For floor-standing and wall-hung WCs

CHARACTERISTICS

- Adjustable in depth
- Geberit Alpha concealed cistern 12 cm fully insulated against condensation
- For top or front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Cistern fulfils standard requirements in accordance with EN 14055, Class II

- Welded flush bend
- Water supply connection on the left or rear left
- Protection box for service opening, can be cut to length, protects against moisture and dirt

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5.8 / 3 l
Flush volume large, adjustment range	4 / 4.5 / 6 / 7.5 l
Flush volume small, adjustment range	2–4 l

Product material Plastic

SCOPE OF DELIVERY

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend extension, ø 45 mm
- Fastening for flush bend
- 2 fixing brackets
- Fastening and protection material
- Geberit pull disc for Type 212 flush valve for Omega concealed cistern 82 cm

Art. no.	B cm	H cm	T cm
109.002.00.1	41.6	39.5	12
New			

New article available from 01.05.2025